


# Technical Specification



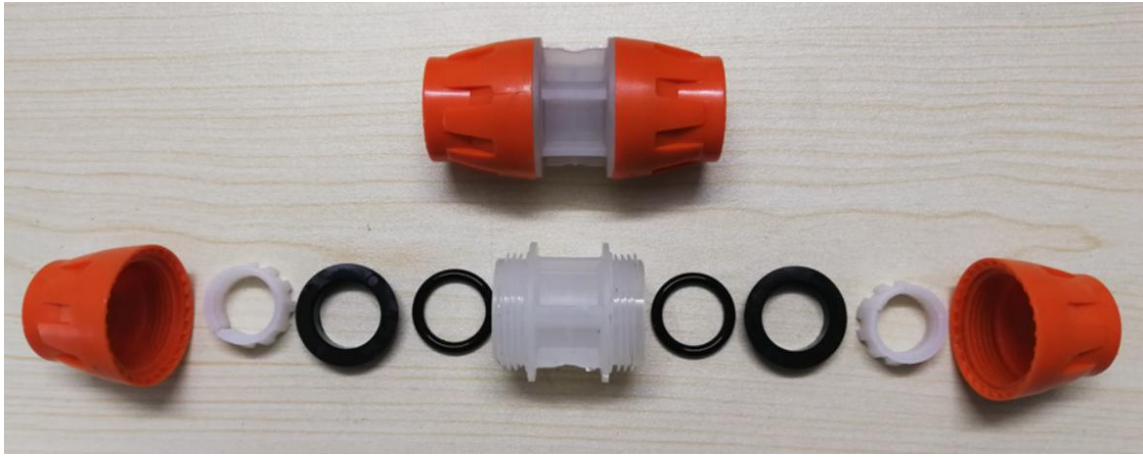

## Material

--Body: PP

--Seal: NBR

--Washer: POM

--Lock Claws: POM

--Nut: POM

--Sleeve: POM

## Description:

--Easy installation, without any special tools.

--To be used direct buried application.

--Transparent plastic body, easy to observe the situation.

--High Pressure resistance >25bar.

--IP Rate: IP68

## OD/ID(mm)

Duct OD/ID	25/20	28/24	32/26	40/33	50/40
Pull out forces	2000N	3000N	4000N	7000N	8000N

### Direct Bury Straight Connector

Specification	Duct OD(mm)	Duct ID(mm)
DB Straight Connector DBC25/22	25	22
DB Straight Connector DBC28/25	28	25
DB Straight Connector DBC32/29	32	29
DB Straight Connector DBC40/36	40	36
DB Straight Connector DBC50/46	50	46

### Direct Bury End Stop Connector

Specification	Duct OD(mm)
DB End Stop Connector DBT25	25
DB End Stop Connector DBT28	28
DB End Stop Connector DBT32	32
DB End Stop Connector DBT40	40
DB End Stop Connector DBT50	50